

Elegant vertical blind with sturdy classic chain operated mechanism made for 89 mm wide vanes in our extensive range of designs in fabric, PVC or aluminium.

Options

| | | |
|-------------------------|------|---------------------------------|
| Orientation side | 2101 | Control-Right / Package-Right |
| | 2102 | Control-Right / Package-Left |
| | 2103 | Control-Right / Central opening |
| | 2111 | Control-Left / Package-Right |
| | 2112 | Control-Left / Package-Left |
| | 2113 | Control-Left / Central opening |

| | | |
|---------------------------|------|----------------|
| Orientation system | 2200 | Cord and chain |
|---------------------------|------|----------------|

| | | |
|-----------------|------|--------------------|
| Fixation | 2300 | Ceiling brackets |
| | 2305 | Wall brackets |
| | 2310 | Extension brackets |


| | | |
|---------------|------|-----------------------|
| Others | 2901 | Different vane colors |
| | 2916 | Valance with corners |

Properties




| | |
|----------------------|--|
| Track | Aluminium 25 x 47.5 mm. Round edges white |
| Runners | Gliding wheels and snap-hook, clear |
| Spacers | Plastic, suitable for 89 mm vanes |
| Bottom weight | Fully heavy weight plastic, white |
| Link-chain | Polyester cord with plastic balls and snap bottom weight connection, white |
| Control | Cord and tilt chain, white |
| | - Cord 2 mm with tension weight, white. |
| | - Chain with plastic balls 6 x 4,5 mm |
| Tilt shaft | Aluminium 3-way |
| Slat holder | Plastic |
| Valance | Insert type with 14 cm corners |

Sundries


| | |
|------------------------------|--|
| Length cord and chain | Standard 2/3 of the height |
| Valance height | 90 mm |
| Vaness | PVC & aluminium vanes without link chain |

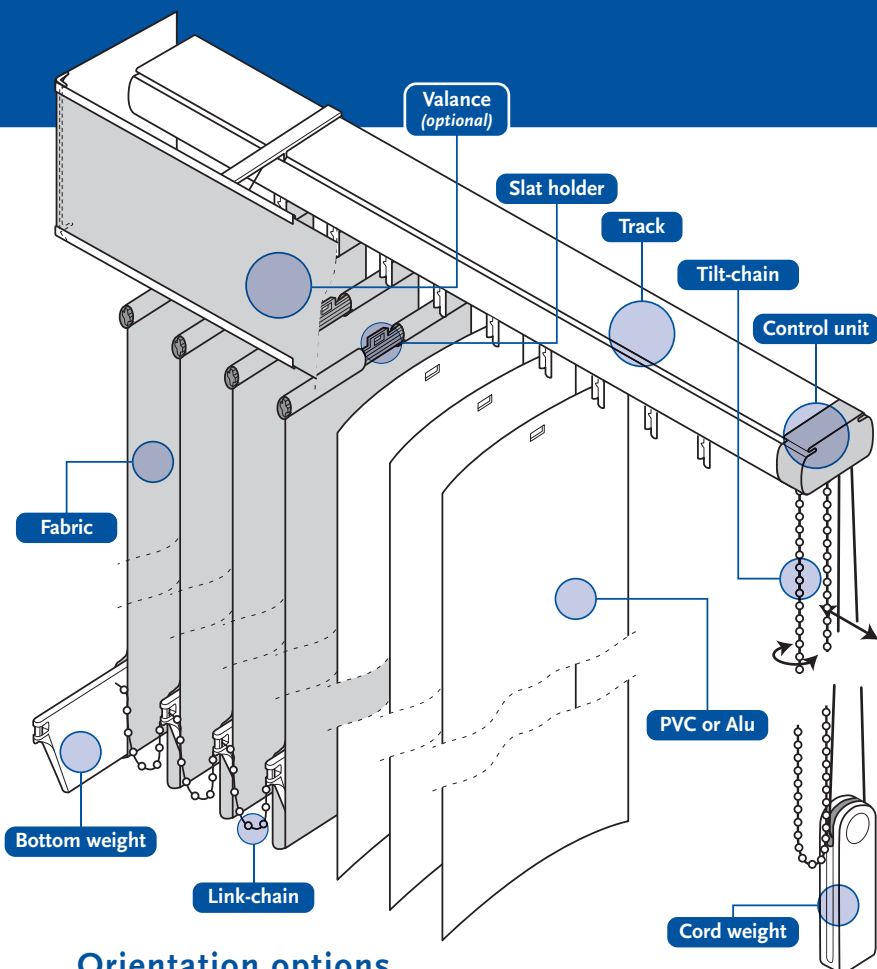

General Topics

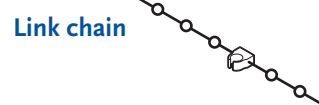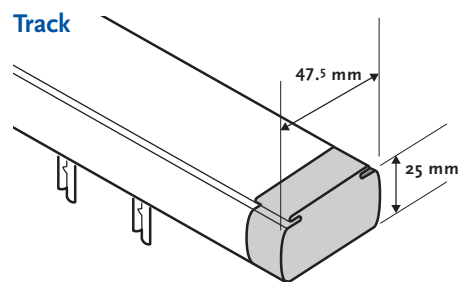


Orientation options

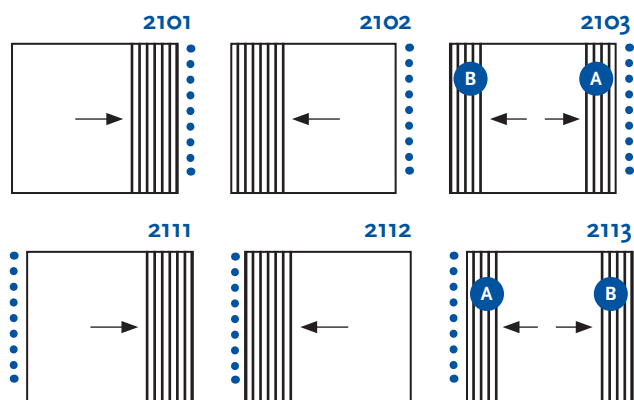


Package sizes

| Track in cm | 1 side in cm L or R | 2 sides in cm | |
|-------------|------------------------|---------------|--------|
| | | A-side | B-side |
| 100 | 20 | 13 | 12 |
| 150 | 27 | 17 | 16 |
| 200 | 34 | 20 | 19 |
| 250 | 41 | 24 | 23 |
| 300 | 47 | 27 | 26 |
| 350 | 54 | 31 | 30 |
| 400 | 61 | 34 | 33 |
| 450 | 68 | 37 | 36 |
| 500 | 75 | 40 | 39 |
| 580 | 82 | 43 | 42 |

Fixation options

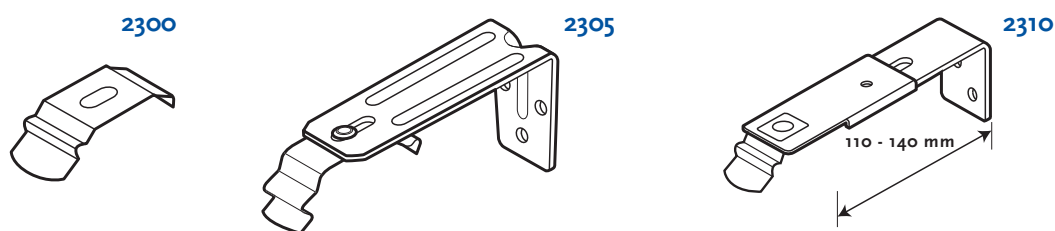

Others

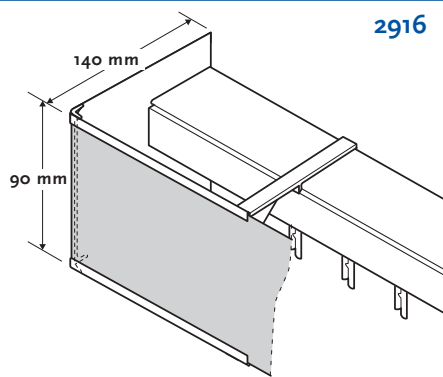

Size restrictions

| Vane Type | Width in cm | | Drop in cm | |
|-----------|-------------|-----|------------|-----|
| | Min. | Max | Min. | Max |
| Textile | 40 | 580 | 40 | 450 |
| PVC | 40 | 450 | 40 | 340 |
| Alu | 40 | 450 | 40 | 340 |

All systems and their accessories are subject to change