


Vertical blind with new smart track and available with either cord operated or wand operated mechanism.

Made for 89 mm wide vanes in a large range of designs in fabric, PVC or aluminium.

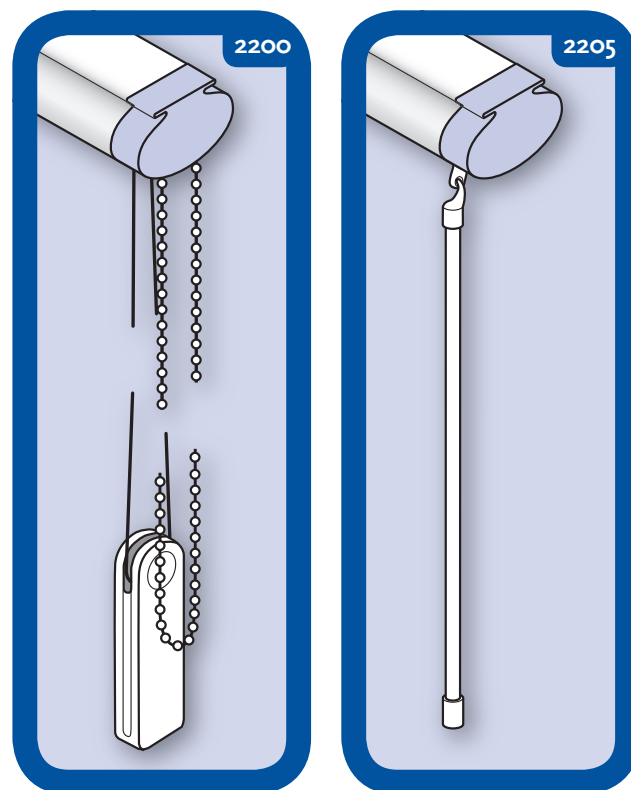

## Options

|                         |      |                                 |
|-------------------------|------|---------------------------------|
| <b>Orientation side</b> | 2101 | Control-Right / Package-Right   |
|                         | 2102 | Control-Right / Package-Left    |
|                         | 2103 | Control-Right / Central opening |
|                         | 2111 | Control-Left / Package-Right    |
|                         | 2112 | Control-Left / Package-Left     |
|                         | 2113 | Control-Left / Central opening  |

|                           |      |   |
|---------------------------|------|---|
| <b>Orientation system</b> | 2200 | Cord and chain  |
|                           | 2205 | Wand (only possible with orientation sides 2101 and 2112) |

## Properties


|                      |   |
|----------------------|---|
| <b>Track</b>         | Aluminium 27,6 x 40 mm, white<br>Curved front & back side   |
| <b>Runners</b>       | Type central with snap hook clear   |
| <b>Spacers</b>       | Plastic, suitable for 89 mm vanes   |
| <b>Bottom weight</b> | Fully heavy weight plastic, white   |
| <b>Link-chain</b>    | Polyester cord with plastic balls and snap bottom weight connection, white                                    |
| <b>Control</b>       | Cord and Tilt chain, white<br>- Cord 2 mm with tension weight, white<br>- Chain with plastic balls 6 x 4,5 mm |
| <b>Tilt shaft</b>    | Aluminium 3-way   |
| <b>Slat holder</b>   | Plastic   |
| <b>Wand</b>          | PVC solid wand 11 mm, white   |
| <b>Valance</b>       | Insert type with 14 cm corners  |

|                 |      |                    |
|-----------------|------|--------------------|
| <b>Fixation</b> | 2300 | Ceiling brackets   |
|                 | 2305 | Wall brackets      |
|                 | 2310 | Extension brackets |




|               |      |                       |
|---------------|------|-----------------------|
| <b>Others</b> | 2901 | Different vane colors |
|               | 2916 | Valance with corners  |

## Sundries


|                              |   |
|------------------------------|---|
| <b>Length cord and chain</b> | Standard 2/3 of the height                  |
| <b>Length wand</b>           | Standard 80 cm<br>Different size on request |
| <b>Vaness</b>                | PVC & aluminium without link chain          |

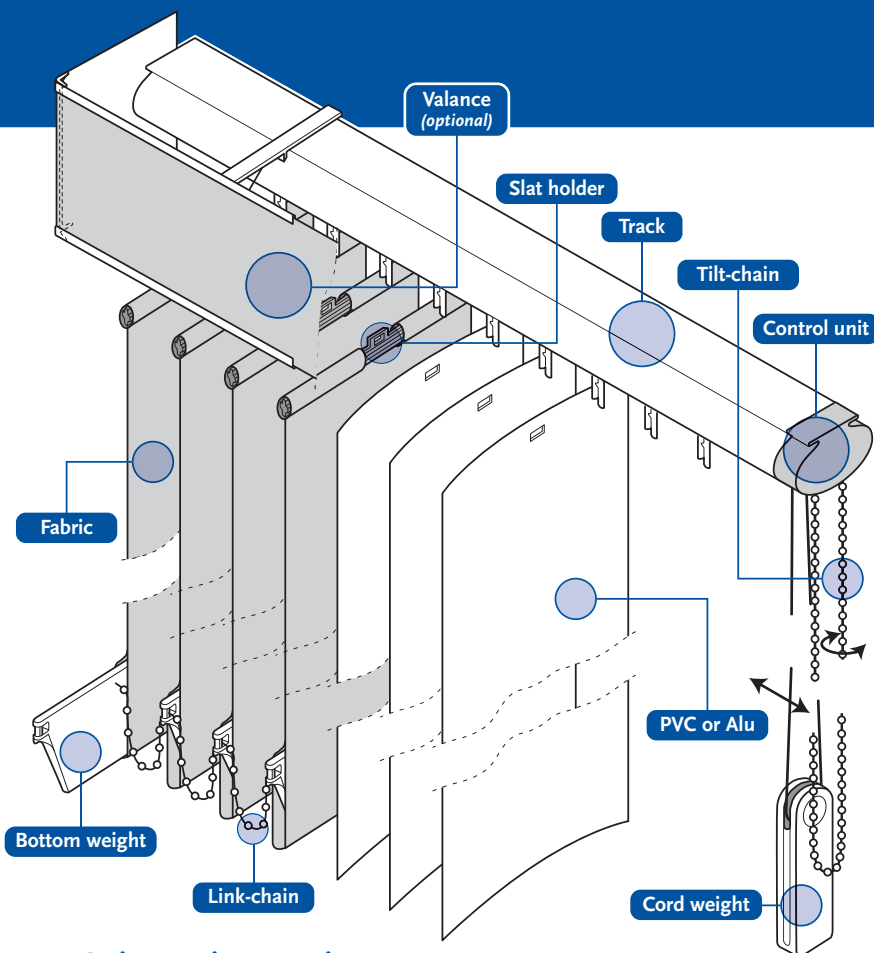

## General Topics

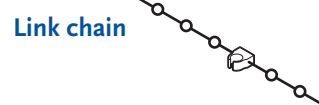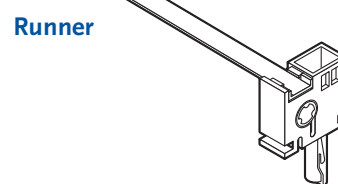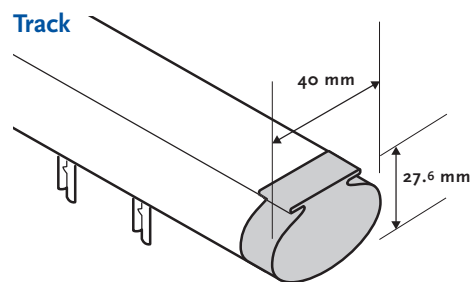


## Orientation options

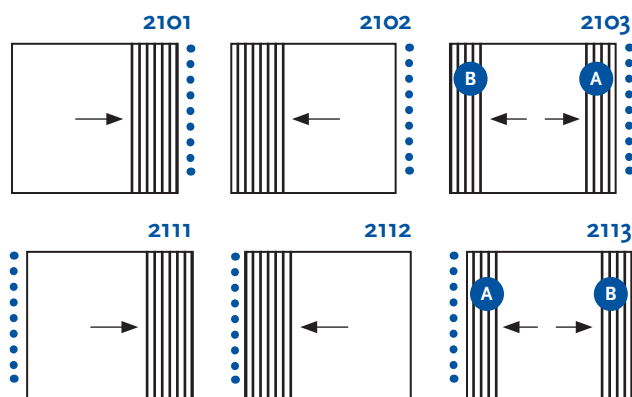


## Package sizes

| Track in cm | 1 side in cm |        | 2 sides in cm |  |
|-------------|--------------|--------|---------------|--|
|             | L or R       | A-side | B-side        |  |
| 100         | 20           | 13     | 12            |  |
| 150         | 27           | 17     | 16            |  |
| 200         | 34           | 20     | 19            |  |
| 250         | 41           | 24     | 23            |  |
| 300         | 47           | 27     | 26            |  |
| 340         | 54           | 31     | 30            |  |


## Fixation options

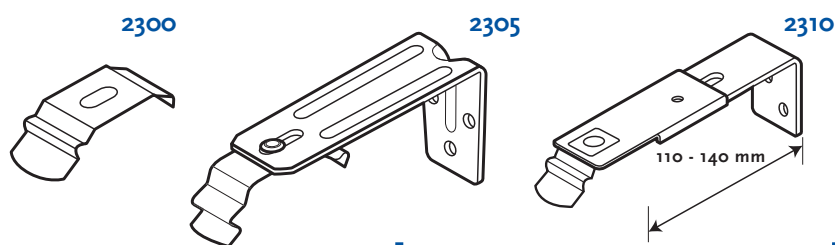

## Control system

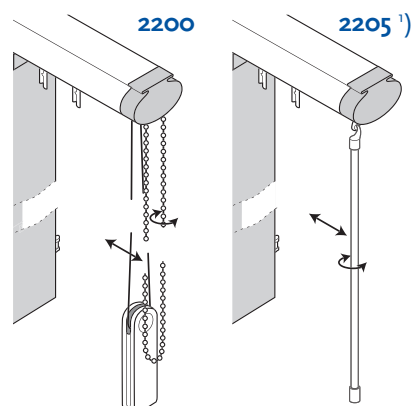

## Others

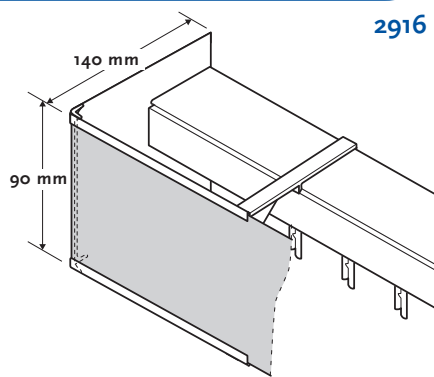

## Size restrictions

| Vane Type            | Width in cm |     | Drop in cm |     |
|----------------------|-------------|-----|------------|-----|
|                      | Min.        | Max | Min.       | Max |
| <b>Cord operated</b> |             |     |            |     |
| Textile              | 40          | 340 | 40         | 340 |
| PVC                  | 40          | 340 | 40         | 340 |
| Alu                  | 40          | 340 | 40         | 340 |
| <b>Wand operated</b> |             |     |            |     |
| Textile              | 40          | 340 | 40         | 340 |
| PVC                  | 40          | 250 | 40         | 210 |
| Alu                  | 40          | 250 | 40         | 210 |

<sup>1)</sup> Only possible with orientation sides 2101 and 2112

All systems and their accessories are subject to change